


TANE ALARM PRODUCTS



Installation Instructions for FM-45 Flange Mount, Surface Mount - Door and Window Contacts with Side Leads & Super-Stick Adhesive, Gap 1”

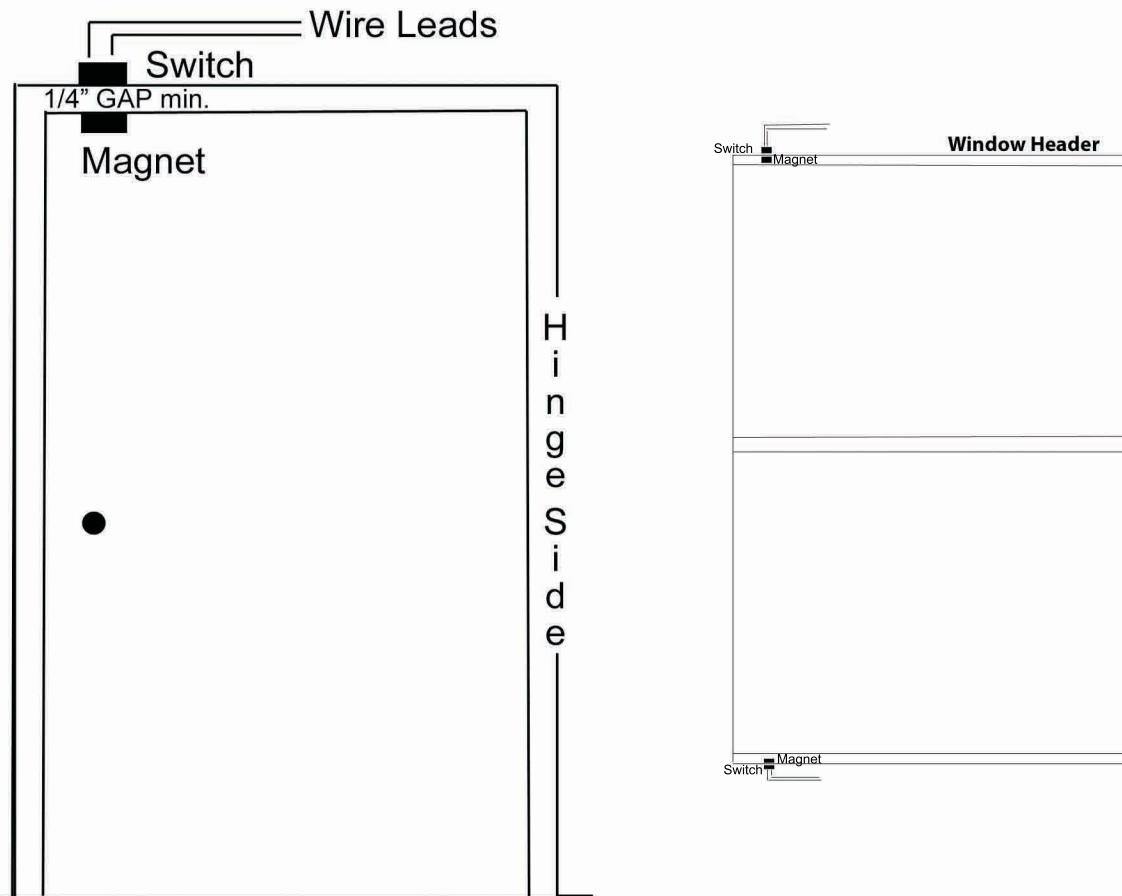

Surface mount switch at top or side (NOT on hinge side) of door or hinged window frame
On double hung window, surface mount the switch at top, side or bottom of window frame
Surface mount the magnet parallel to the switch

Make sure Gap is not less than 1/4” between switch and magnet

Splice leads from switch into alarm circuit

NOT intended for Steel doors or windows

A compatible power source with power-limited output, and that is UL® Listed for Residential or Commercial Burglary Alarm applications shall be used with the magnetically-actuated switch.

WWW.TANEALARM.COM

906 Jericho Turnpike
New Hyde Park, NY 11040

Tel: 516-328-3351 800-852-5050
Fax: 516-326-9125 Email: info@tanealarm.com