


# TANE ALARM PRODUCTS



## Installation Instructions for TANE-45 Surface Mount - Door and Window Contacts with Super-Stick Adhesive Gap .44”

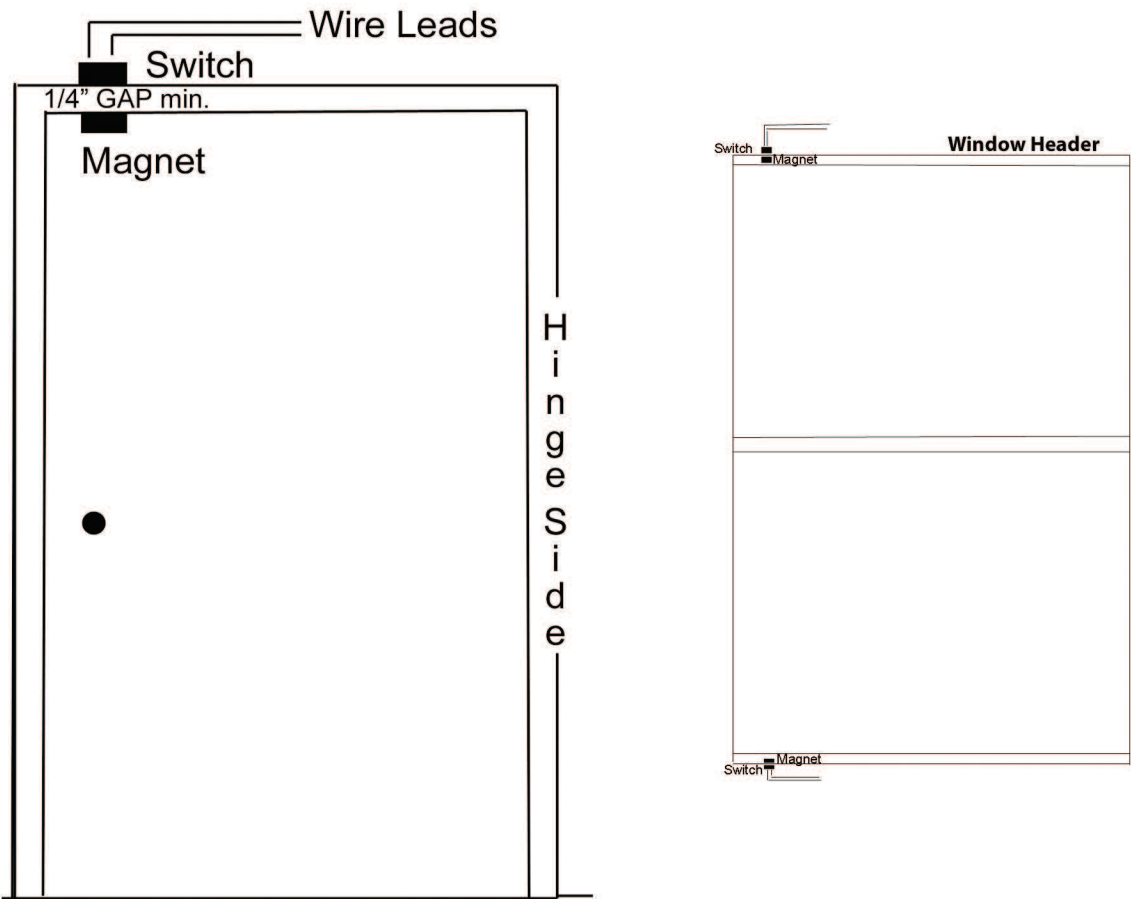

Surface mount switch at top or side (NOT on hinge side) of door or hinged window frame  
On double hung window, surface mount the switch at top, side or bottom of window frame  
Surface mount the magnet parallel to the switch  
Make sure Gap is not less than 1/4” between switch and magnet  
Splice leads from switch into alarm circuit  
NOT intended for Steel doors or windows  
A compatible power source with power-limited output, and that is UL® Listed for Residential or Commercial Burglary Alarm applications shall be used with the magnetically-actuated switch.

**WWW.TANEALARM.COM**

906 Jericho Turnpike  
New Hyde Park, NY 11040

Tel: 516-328-3351 800-852-5050  
Fax: 516-326-9125 Email: info@tanealarm.com