

TANE GP-23 SURFACE MOUNT CONTACTS

1.97"L x .55"W x .47"H Surface Mount Type W/Hidden Wires and Screws



Contact Size: 1.97"L x .55"W x .47"H

(50mm x 14mm x 12mm)

Standard Magnet Size: 1.98"L x .56"W x .48"H

(50.3mm x 14.1mm x 12.2mm)

Standard Gap: 1.26" (32mm)

Colors: White, Brown, Gray, Tan, Black

Specifications

Part Number	Gap Inch(mm)	Loop Open/Closed	Reed Form	Max. Contact Rating (W)	Max. Initial Contact Resistance (mΩ)	Max. Switching Voltage (V)	Max. Switching Current (A)
TANE GP-23	1.26"(32)	CLOSED	Normally Open	10	100	AC110/DC100	0.5
* TANE GP-24B	.95"(24)	OPEN	Normally Closed	3	100	AC30/DC30	0.2
* TANE GP-23 WG Special Order	1.5"(38)	CLOSED	Normally Open	10	100	AC110/DC100	0.5

OPERATING TEMPERATURE: -40°C to +60°C


*Not UL Listed

SPECIAL ORDER - Call for Min. Order Qty. - Leadtime - Pricing

Outline Dimensions

Unit: inch(mm)

TANE GP-23/TANE GP-24B/TANE GP-23 WG

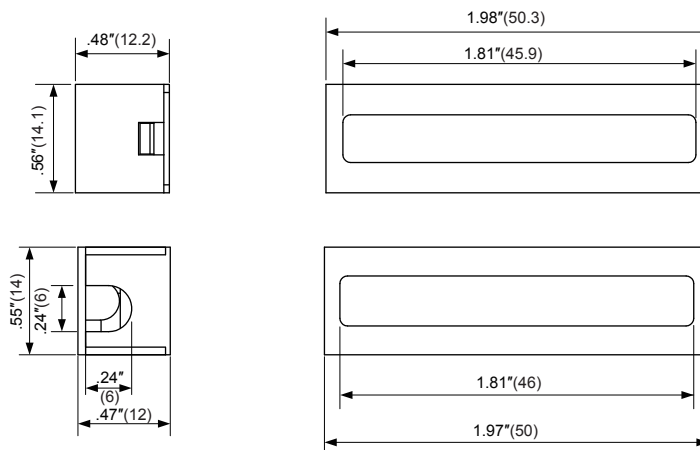

The Best Industry Guarantee Since 1984®
TANE ALARM PRODUCTS

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com