

MINI-15

RECESSED CONTACTS

.25"(6.4mm) × .57"(14.5mm) Recessed Type



Contact Size: .25"×.57"(6.3mm×14.5mm)

Standard Magnet Size: .25"×.31"(6.4mm×8mm)



Standard Gap: .5"(12.5mm)

Colors: White, Brown



12"(305mm) 22 AWG Leads Standard

Longer leads available.

Specifications


Part Number	Gap Inch(mm)	Loop Open/Closed	Reed Form	Max. Contact Rating (W)	Max. Initial Contact Resistance (mΩ)	Max. Switching Voltage (V)	Max. Switching Current (A)
MINI-15	.5"(12.5)	CLOSED	Normally Open	1	100	AC24/DC24	0.1
MINI-15 W/.54	.6"(15)	CLOSED	Normally Open	1	100	AC24/DC24	0.1
MINI-15 W/.79	.75"(19)	CLOSED	Normally Open	1	100	AC24/DC24	0.1
MINI-15 DM	.5"(12.5)	CLOSED	Normally Open	1	100	AC24/DC24	0.1

OPERATING TEMPERATURE:-40°C to +60°C

Outline Dimensions

Unit: inch(mm)

MINI-15

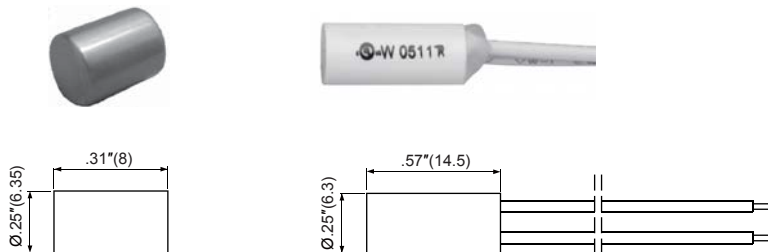

The Best Guarantee Since 1984 : \$50-1

TANE ALARM PRODUCTS

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com


MINI-15

RECESSED CONTACTS


Outline Dimensions

Unit: inch(mm)


MINI-15 W/.54

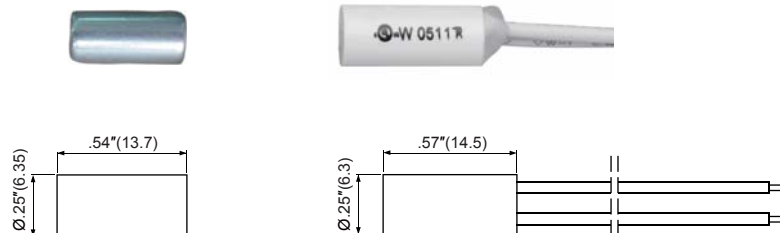

MINI-15 W/.79

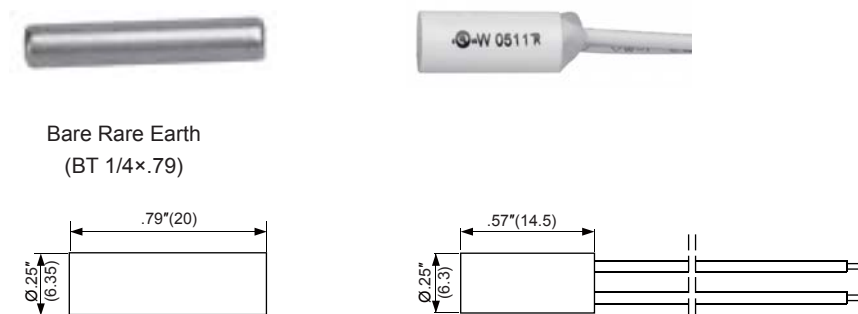

MINI-15 DM

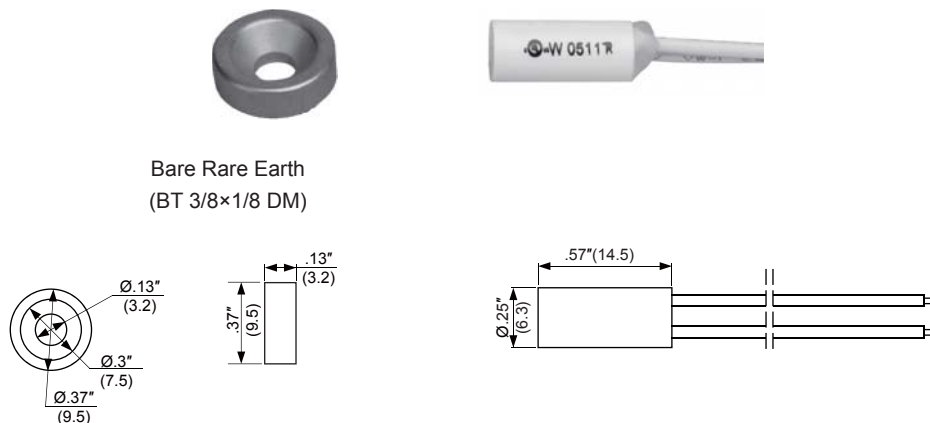

The Best Guarantee Since 1984 : \$50-1

TANE ALARM PRODUCTS

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040

Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com