

2"L×.38"W×.39"H Center Lead Surface Mount Type



Contact Size: 2"L×.38"W×.39"H

(50.8mm×9.6mm×10mm)

Standard Magnet Size: 2"L×.38"W×.39"H

(50.8mm×9.6mm×10mm)



Standard Gap: .75"(19mm)

Colors: White, Brown

12"(305mm) 22 AWG Leads Standard



US LISTED

Longer leads available.

Specifications

Part Number	Gap Inch(mm)	Loop Open/Closed	Reed Form	Max. Contact Rating (W)	Max. Initial Contact Resistance (mΩ)	Max. Switching Voltage (V)	Max. Switching Current (A)
TANE-55	.75"(19)	CLOSED	Normally Open	10	100	AC110/DC100	0.5
* TANE-55 WG Special Order	1.26"(32)	CLOSED	Normally Open	10	100	AC110/DC100	0.5
* TANE-56B Special Order	.75"(19)	OPEN	Normally Closed	3	100	AC30/DC30	0.2
* TANE-57C Special Order	.75"(19)	SPDT	SPDT	3	100	AC30/DC30	0.2


OPERATING TEMPERATURE:-40°C to +60°C

*SPECIAL ORDER - Call for Min. Order Qty. - Leadtime - Pricing

Outline Dimensions

Unit: inch(mm)

TANE-55/TANE-55 WG/TANE-56B

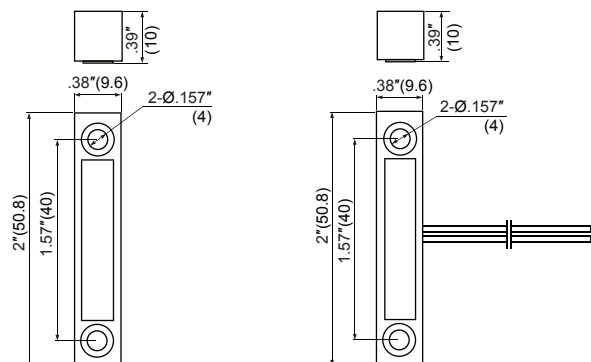

The Best Guarantee Since 1984 : \$50-1

TANE ALARM PRODUCTS

906 JERICHO TURNPIKE, NEW HYDE PARK, NY 11040


Tel: 800-852-5050 • 516-328-3351 • Fax: 516-326-9125

www.tanealarm.com • E-MAIL: info@tanealarm.com

Outline Dimensions

Unit: inch(mm)

TANE-57C

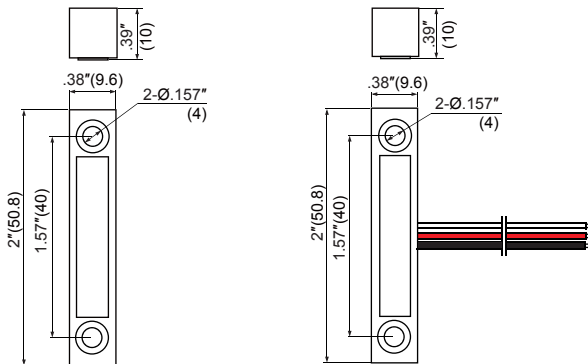

TANE-57C Wiring Diagram

